

# ELYONDA


Elyonda are corrugated or ribbed opaque sheets made of polyester resin reinforced with fiberglass and alumina. Elyonda is produced using an exclusive isophthalic anti-UV gel coat applied to the surface exposed to weather corrosion (resulting in a high degree of resistance to abrasion).


Light, resistant and long-lasting, the Elyonda sheets are designed to satisfy all kind of roofings.

## **PROFILES**








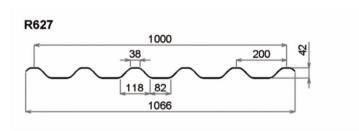


#### **RIDGES**

R104







## **COLOURS**













\*These colours are available on request.

## **TECHNICAL DATA SHEET**

Opacity	100% opaque
Weight	3,2 - 3,5 - 3,8 - 4,2 kg/m²
Operating temperature	-60 °C + 140 °C
Reaction to fire	B2 (DIN 4102 Teil 1) C S3 Do (UNI EN 13501-1) and B <sub>roof</sub> (t1) (UNI EN 13501-5): only for 4,2 kg/m²
Resistance to chemical agents	Ammonia conc. 30% - Sulphuric acid 30%